





CUSTOMIZED MUSCLE

The RL-3 attaches to our TT-2 dump trailers, or use it to load other trucks in high volume situations. It's maneuverable and versatile – letting you get the job done your way.

Here Are a Few More Benefits:

4 Control Options

Standard Valve Handles, Mechanical Joysticks, Pilot Hydraulic Joysticks, or QUADSTICK® Controls

O 3 Control Locations

Side Mount, Top Mount, or Dual Walk-Through

O 1 Legendary Loader

Built to your needs



American born. American made.


Efficient, dependable one-man operations for secure solid waste removal. Revolutionizing grapple trucks since 1957 and home to the original, industry-defining Lightning Loader®.

WE BUILD LEGENDS.



GENERAL SPECIFICATIONS

Reach	20 ft.	
Main Boom & Tip Boom	16 ft.	
Tip Extension	4 ft.	
Outrigger Span	11 ft. 8 in.	
Tare Weight (empty)	18,240 lbs.	

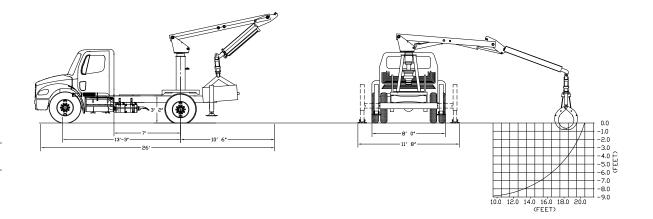

SYSTEM DESCRIPTION

- Grapple loader mounted on a short frame chassis
- Designed for greater maneuverability
- Load into an attached dump trailer or into separate haul trucks

RECOMMENDED CHASSIS (MINIMUM)

Body Style	Conventional Cab	GVW Rating	33,000 lbs.
Cab-to-Axle Dimension	84 inches	Frame	900,000 RBM
Front Axle Rating	12,000 lbs.	Engine	210 HP Diesel
Rear Axle Rating	21,000 lbs.	Transmission	Automatic

CONTROL OPTIONS

- Dual manual controls (Dual walk-thru)
- QUADSTICK® mechanically linked dual joystick controls (Dual walk-thru)
- Side-mount seat controls manual or mechanical joysticks
- Stationary Top-mount controls manual or mechanical joysticks
- Side-mount with All-weather cab manual or electronic joysticks, or pilot hydraulic joysticks
- Mobile Mount racks between loader & chassis

LIFT CAPACITY

Radius	Over Rear	Over Side		
10 ft. radius	7,100 lbs.	5,500 lbs.		
16 ft. radius	4,400 lbs.	3,100 lbs.		
20 ft. radius	3,200 lbs.	1,800 lbs.		

CONTACT PETERSEN INDUSTRIES FOR COMPLETE SPECIFICATIONS.







4000 SR 60 West Lake Wales, FL 33859

1.800.930.LOAD (5623)

TIGHTNING LOADED.



PETERSENIND.COM

Contact Us Today To Learn More